

# OPEN TOP PREP. TABLES

## Back Mounted Condensing Unit

EOTP – Series • EOTP1 • EOTPS2 • EOTP2 • EOTPW2 • EOTP3



▲ EOTP1



▲ EOTPS2



▲ EOTP2



▲ EOTPW2



▲ EOTP3

### Cabinet Construction

Heavy duty stainless steel interior and exterior, and galvanized steel finished bottom. High quality 16 gauge stainless steel worktop and top lids. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

### Refrigeration System

- Back mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature recovery
- Slide-out condensing unit for convenient repair and maintenance
- Front air breathing for built-in applications
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pressure relief ports for rapid re-entry
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

### Options

- 9 1/8" deep cutting board
- 2 1/2" diameter casters (3 1/2" overall height)

### Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick foamed-in-place polyurethane insulation
- Rounded corners for a comfortable and hazard-free work space
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles for a flat surface
- Model available in left hinge upon request (EOTP1)

### Preparation Area

- Mega-top, three rows of 1/6 sized pans
- Removable top cover(s), 1/2" thick foam insulated cover(s) to prevent moisture build-up and heat exchange
- Sanitary polycarbonate pans with lids  
*(note: refer to website for pan configurations)*

### Shelving

- One epoxy coated wire shelf per section
- Stainless steel pilasters and shelf clips







### Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat



**5 YEAR** Compressor  
**3 YEAR** Parts & Labor

# Dimensions

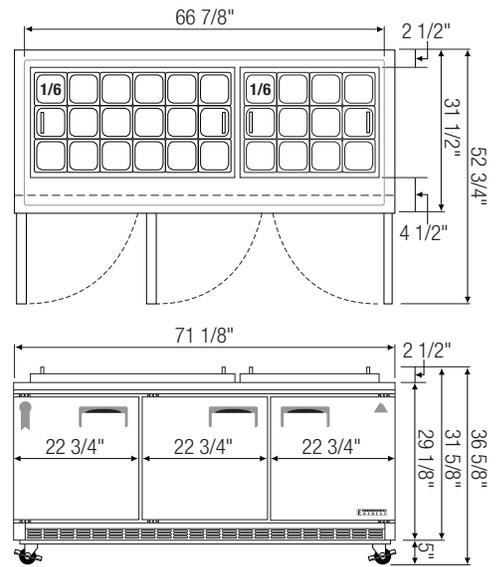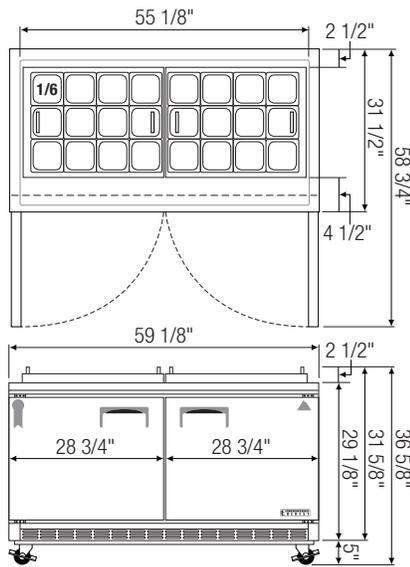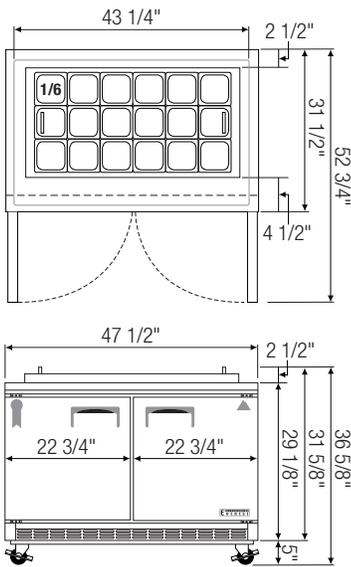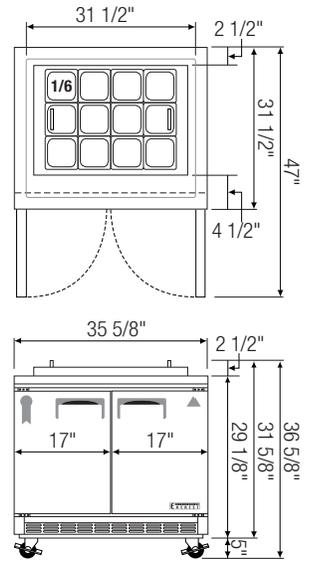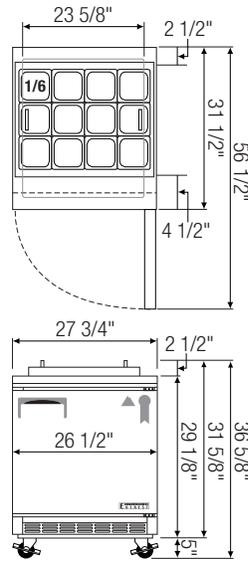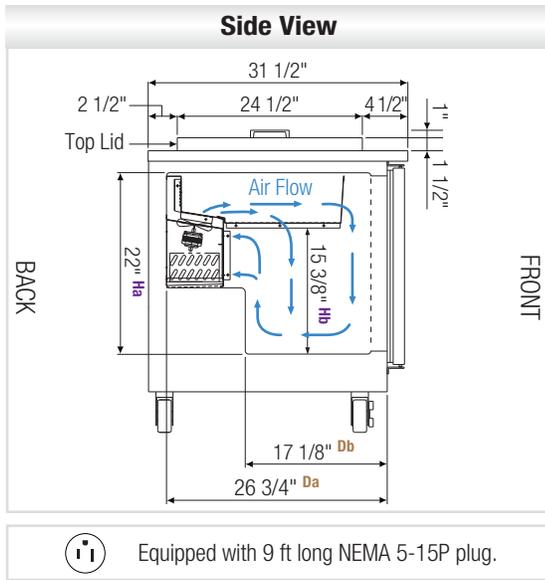

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
EOTP1	Ref	1	8.05	1/5	R-134A	1	1/6 x 12 <sup>a</sup>	115-60-1	3.98	203	27 3/4	31 1/2	31 5/8
EOTPS2	Ref	2	10.73	1/5	R-134A	2	1/6 x 12	115-60-1	3.98	247	35 5/8	31 1/2	31 5/8
EOTP2	Ref	2	14.73	1/4+	R-134A	2	1/6 x 18	115-60-1	4.11	302	47 1/2	31 1/2	31 5/8
EOTPW2	Ref	2	18.77	1/3	R-134A	2	1/6 x 24	115-60-1	5.20	354	59 1/8	31 1/2	31 5/8
EOTP3	Ref	3	22.78	1/3	R-134A	3	1/6 x 30	115-60-1	5.20	407	71 1/8	31 1/2	31 5/8

\* : Height does not include 5" for casters; height includes top lid and handle.

Ref = Refrigerator

a : Pan count applicable for units manufactured from April 2016.

Da, Db : Interior Depth Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.